


## **GMX100 Compact Weather Station**

The MaxiMet range of compact weather stations is designed and manufactured by Gill Instruments. MaxiMet products use reliable, high quality instruments to provide accurate meteorological information in a wide variety of applications.

## **GMX100 Features**

**Precipitation.** An integrated optical rain gauge that automatically senses water hitting its outside surface and provides measurements based on the size and number of drops. Algorithms interpret this data and simulate the output of a tipping bucket rain gauge in a serial format. The optical rain gauge has no moving parts associated with tipping bucket gauges.



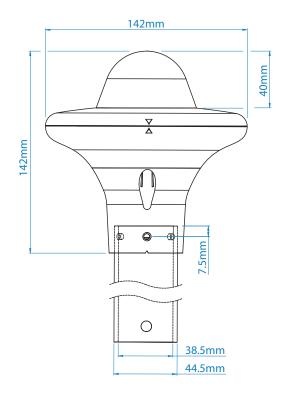

PRECIPITATION	PARAMETERS
<ul> <li>Rainfall total</li> <li>Rainfall intensity</li> <li>Rainfall Y/N</li> <li>Emulated tipping bucket</li> <li>Integrated heater</li> <li>No moving parts</li> </ul>	<ul> <li>Precipitation mm/hr, mm/total, mm/24 hr in/hr, in/total, in/24 hr</li> <li>Outputs RS232, 422, 485 (ASCII), SDI-12, NME MODBUS, Analogue (option)</li> </ul>

## **All MaxiMet Models Feature**

- Quality Measurements
- Lightweight and Robust
- Low Power Mode
- Free of Charge Software
- Gill Proven Reliability
- Compact Integrated Design
- Real Time Output
- Easy Installation
- Gill Customer Support
- 2 Year Warranty



## **Applications**

- Building and Industrial Controls
- Authorities
- Transport

- Coastal
- Agricultural
- Safety

- Educational
- Commercial
- Energy

PRECIPITATION		
Measurement type	Optical	
Range	0 to >300 mm/hr	
Precipitation Resolution	0.2 mm	
Repeatability	3%	
Sampling Rate	1 Hz	
Units	mm/hr, mm/total, mm/24 hr, in/hr, in/total, in/24 hr	
Heating	YES	

OUTPUTS	
Output rate	1/s, 1/min, 1/hr
Digital Comms Modes	Serial RS232, RS422, RS485, SDI-12, NMEA, MODBUS, ASCII
Analogue Outputs	Available via separate optional device

POWER	
Power Supply	5 to 30 Vdc
Power (Nominal) 12 Vdc	80 mA continuous high mode. 0.7 mA eco-power mode (1 hour polled)

ENVIRONMENTAL CONDITIONS		
IP Rating	66	
Operational Temperature Range:	-40°C to +70°C	
EMC Standard:	BS EN 61326 : 2013 FCC CFR47 parts 15.109	
CE Marking	YES	
RoHS compliant	YES	
Weight	0.3 Kg	
Origin	UK	

Specifications may be subject to change without prior notice



Avenida Benjamin Franklin, 28 B 46980 - Paterna (VALENCIA)

Tel: (+34) 968 162 005 comercial@sensovant.com www.sensovant.com

